

A Guide to Seismic Design & Detailing of Reinforced Concrete Buildings in Australia

Scott Munter¹, John Woodside² and Peter McBean³

¹ Executive Director, Steel Reinforcement Institute of Australia

² Principal, J Woodside Consulting Pty Ltd

³ Joint Managing Director, Wallbridge and Gilbert, Adelaide

Abstract: The original Guide on the Seismic Detailing for Reinforced Concrete Buildings in Australia was published in 1995 by the SRIA following the publication of the second Australian earthquake standard AS 1170.4. There have been two revisions of AS 3600 Concrete Structures and a new earthquake standard AS 1170.4 since the original document. There have been significant advances in the analysis software for buildings, and the understanding of earthquake design has improved through advances in research, and actual seismic performance. AS 3600, provides Australian designers with the design rules for earthquake design to meet the typically lower seismicity of Australia. Most Australian commercial buildings are cast in situ reinforced concrete, designed and detailed to comply with AS 3600, for regions of lower seismicity, deeming the structure to have adequate ductility as a life safety measure.

The fundamental principle of concrete design is that the design and the detailing are inseparable. Appropriate detailing is required to ensure that the structure will respond under the seismic loading as assumed in the design. Technology and reduced design times can shift the focus away from the vital reinforcement detailing phase of the project.

The Guide's overall aim is to enable cost effective, simple design solutions by giving the designer the practical detailing information to efficiently determine requirements for the overall structural performance under seismic loadings. Reinforcement scheduler input in this specialised field provides current practice for graduate, practicing engineers with little seismic experience and senior engineers requiring refreshment. This paper describes the revisions to the Guide.

Keywords: Reinforcement, seismic, detailing, concrete.

1. Introduction

Unfortunately in Australia there is a generation of engineers, contractors and clients who do not believe that earthquakes occur in Australia, despite the long history of earthquakes in Australia and the 1989 Newcastle Earthquake (1,2). Because they have never experienced an earthquake, and with the pressures of modern design and construction, it does not allow them time to think about the issues as well as they should. It is anticipated and hoped that this Guide will provide the necessary design information to improve the design and detailing of reinforced concrete buildings for seismic loads.

Fortunately significant earthquakes in Australia are rare and probably will not occur during the average lifetime of a building. A major earthquake will generate the most severe structural demand ever experienced by a building. Given the rare and extreme nature of earthquakes, for economic reasons, designers are largely concerned about preserving life and preventing structural collapse. For most concrete structures, this will require the structural system to resist the imposed deformation in-elastically over a number of load cycles.

The first Guide on the Seismic Detailing for Reinforced Concrete Buildings in Australia was published in 1995 in response to the second Australian earthquake code AS 1170.4 (3). The updated and rewritten Guide is intended to assist graduate engineers, practicing engineers and other designers with limited seismic experience and senior engineers seeking to refresh themselves of the current developments and practical aspects of reinforcement design and detailing for seismic actions in Australia.

Since 1995, there have also been significant advances in analysis software; our understanding of earthquake design has improved through advances in research and combined with actual performance of buildings under seismic loads. AS 3600 (4) and AS 1170.4 (5), provides Australian designers with the minimum design rules for earthquake design for buildings to meet the typically lower seismicity of Australia. Most commercial buildings in Australia are in situ reinforced concrete, designed and detailed in accordance with AS 3600. Complying with the Standard for regions of lower seismicity deems the

structure to have adequate ductility [as a life safety measure](#). However, this concept of life safety is often poorly understood or not properly articulated by designers.

For lower values of the ductility factor $\mu \leq 2$, detailing of the concrete is only required in accordance with the body of the Standard and for higher values of ductility factor μ , detailing is required in accordance with Appendix C of AS 3600. Levels of ductility $\mu > 3$ are outside the scope of the Standard, and design and detailing to NZS 1170.5 (6), and NZS 3101 is suggested.

The fundamental principle of concrete design for the successful performance of a concrete structure under seismic actions is that [design and the detailing are inseparable](#). Appropriate detailing is crucial to ensure that the structure will respond under seismic loading in the manner for which it has been designed. Time and time again, earthquakes have shown that correct detailing of reinforced concrete structures can significantly improve the capacity of the building to resist seismic actions, even for a poorly designed structure.

This Guide is not a complete document covering all design situations or requirements, but an assortment of basic seismic principles, design advice, and fundamentals to assist and help designers. It also suggests further study of the principles and practice of seismic design and detailing. This information is presented by focusing on the key, functional and practical aspects of seismic design and detailing of reinforcement with references to specialist information. Technology and reduced design and construction times can shift the focus away from the vital reinforcement detailing phase of the project. The overall aim is to enable cost effective, simple design solutions by giving the designer the practical detailing information in order to efficiently determine the requirements for the overall structural performance under seismic loadings.

2. Risk mitigation and low damage design for buildings

Unfortunately, clients and societies expectations compared with the reality of seismic performance may not match the minimum requirements of the Standards for life safety, as shown in Christchurch. For instance, does a building in the event of an earthquake require protection of irreplaceable contents such as a museum or is there a need for the continuing use of the building such as a hospital after the event or in the extreme condition that it contains dangerous materials such as a biological laboratory dealing with dangerous viruses. These are issues that the designer must consider in the early phase of the design.

The highest level of protection for a building available is base isolation, but it has not been used in Australia. The next level of protection is to minimise the damage by using a more robust and regular structure with a higher level of ductility. This will protect the primary structure even in the most severe earthquake with many alternative load paths and backup systems designed and detailed for greater forces than the minimum required by the Standard. The great advantage of this approach is that the structure should be operational and repairable; insurance may be less, and the mitigation of the risk of structural damage and business continuity is achieved but at an increased cost to the original construction of reinforced concrete building. It is thought that the increased order of the total cost would be as little as 1% to 3% of the total construction cost of a concrete building over the lowest level of protection required by the Standard. This assumption is based on a structural cost being 25% of the total cost of the building, and the additional design and detailing would result in an increased structural cost in the order of 5-10% including professional fees.

3. Analysis and design

The aim of the analysis and design is to produce a safe, serviceable, aesthetic, economical and sustainable structure. Simple design does not mean elementary design but rather well conceived and quality design and adequate detailing including the earthquake design. Designers should always strive for simplicity, clarity and excellence in their design and detailing and maintain a strong focus on the detailing of reinforcement for seismic loads, as part of the design process.

Traditionally earthquake design has been based on a [quasi-static](#) forces approach where [hypothetical](#) static loads are applied to simulate the dynamic forces of an earthquake. Unfortunately, this may bear no resemblance to the actual earthquake forces when they occur, as earthquakes do not know about

Standards, methods of design or indeed the building being designed. For this reason, the earthquake actions will almost certainly not be those specified by the Standards.

There are a number of fundamental problems with the force-based method of analysis. These include choosing the right model, the selection of appropriate member stiffnesses and determining the static forces that are appropriate for the design being considered. Member stiffnesses cannot be resolved until the design is complete, and yet they will change during a seismic event. In addition, the static design forces applied to the structure may not bear any relationship to the actual dynamic forces applied. The distribution of local forces is based on elastic estimates of stiffness. This tends to concentrate the strength in elements of the greatest potential of brittle failure, such as walls.

There have been large advances in the past 20 years in our understanding of how concrete performs under seismic loads, in the technology and design of concrete, changes to reinforcement and enormous advances in computers and software and analysis tools. The computing power and software now available to designers has led to far more elaborate and sophisticated analysis and design of buildings and indeed more refined design.

This technology can lull the designer into a false sense of security, believing they fully understand how the structure will act under dynamic loads of an earthquake, when the actual effects of an earthquake may be far different from the computer model. This is because the structure is sized on non-seismic load considerations; member stiffnesses will change during the earthquake and other factors such as local failures will affect the model. This may result in the model and sophisticated analysis being entirely inappropriate in a major earthquake event.

Analysis is only part of the design process. Good designers know there is far more to design than just analysis and designers must understand the behaviour of each member and how they are expected to resist all of the applied actions and why these members need to be detailed for the seismic actions. In a real structure, the behaviour under load of individual elements can be complex depending on the materials used and many other factors, which will change under earthquake actions. Idealised computer models of the frame or structure are used for the analysis of a structure to simulate how the real structure may behave, but they can be very crude when assessing the structure under seismic loads.

4. Reinforcement and concrete

For a structural ductility factor $\mu \leq 2$, AS 3600 Appendix C, allows the structure to be designed and detailed in accordance with the main body of the Standard and both Class L and N reinforcement can be used. Although, not covered by AS 3600, any chord members, collector reinforcement or drag bars used in diaphragm action should be Class N reinforcement, because of the anchorage requirements and ductility demands for this reinforcement.

For a structural ductility factor, $2 < \mu \leq 3$, structures have to be designed and detailed in accordance with the main body of AS 3600 and Appendix C. Although Class L reinforcement is allowable under AS 3600 for walls and slabs, where Class L reinforcement is used for loadbearing walls and suspended floors and slabs when acting as diaphragms, designers need to ensure the reinforcement is capable of meeting the increased ductility and drift demands. For IL4 buildings, Class L reinforcement is not recommended in structural elements except as fitments for beams and columns, shrinkage reinforcement, for reinforcement to steel metal decking or non-structural elements, because of the increased ductility demands.

While structures will have concrete strengths typically in the range of 25 to 40 MPa, high strength concrete up to 100 MPa is allowed under AS 3600. High strength concrete is principally used in columns and walls where the size of such elements needs to be minimised. Designers should be careful using high strength concrete in columns and walls for buildings designed for a structural ductility factor $\mu > 2$ or with a post disaster function, as high strength concrete is a brittle material requiring additional detailing of the reinforcement to prevent brittle failure.

5 Robustness

Structural robustness is discussed briefly in the commentary to AS 1170.0 (7) but is not well defined. There are no specific requirements for design for structural integrity (the prevention of progressive collapse) or robustness in the BCA (8) or AS 3600. The AS 3600 Commentary (9) has some limited information on this requirement. Nevertheless, because of overseas experience and failures, designers must consider the robustness of reinforced concrete building including reinforcement detailing.

In simple terms a structure should be safe and the Eurocode provides the following definition of robustness *“the structure shall be designed and executed in such a way that it will not be damaged by events like fire, explosion, impact, or the consequences of human error, without being damaged to an extent disproportionate to the original cause.”*

Progressive and disproportionate collapse must be avoided at all times. This means that the failure of one member should not set off a chain of events where the structure progressively collapsed as occurred in the failure of the columns of the Newcastle Workers Club in 1989, Melcher and Woodside (10,11) .

Robustness will require that all structures have a resistance to lateral loadings, and if none are specified, then a notional percentage of the vertical loads should be adopted. Redundancy is also an important issue as a failure of any load-bearing member must not lead to the collapse of the entire structure.

The building structural form will significantly affect its robustness and for this reason needs to be considered at the concept stage. An example of this might be a large transfer beam supporting a large part of the building so failure of this element would be catastrophic and should be avoided if possible or the design robust enough to provide a considerable reserve of strength.

Columns and walls should not be heavily loaded and designed so that the design values are below the balance point and well detailed (12). Compatibility of drift must also be considered.

Precast and tilt-up structures are more susceptible to the effect of abnormal actions than some traditional forms of construction because of the presence of joints between the structural elements. However, experience has shown that it is possible to manage these issues by effectively tying together the various elements of the structure and correct detailing. (13, 14)

Buildings should have sufficient robustness to survive without collapse if subjected to the ground motion in excess of that specified by Australian Standards. Well-proportioned and well detailed in-situ reinforced concrete structures are inherently robust. It is important to ensure that the structure is tied together; can resist some notional lateral load, and the failure of a particular element will not lead to progressive collapse. There are several overseas documents on structural robustness and progressive collapse (15, 16).

Reinforcement detailing for robustness also needs to address some basic requirements as follows:

- Minimum reinforcement should be provided in both faces of horizontal members such as beams and floor slabs even if the design does not require it or detailing is not required in the Standard.
- Detailing in accordance with Appendix C of AS 3600 will be required for buildings with a post-disaster function and for buildings where the ductility $\mu > 2$.
- Critical members should be reviewed for their role in the structure, detailed as required, and alternative load paths considered.
- Eliminate punching shear failures at columns at flat slabs and similar by providing additional bottom face reinforcement

6. Acceptable drift limits

AS 1170 .4 sets out the maximum drift requirements for buildings. However, the maximum inter-story drift due to reduced stiffnesses must not exceed 1.5% of the storey height at each level at the ultimate limit state. These lateral displacements can be large (in the order of 30 to 50 mm). Many structures may not be

able to accommodate such drifts without premature failure of structural elements. Also, calculations associated with drift are often poorly understood, and stiffness assumptions are sometimes wrong.

Even if a part of a structure is not designed specifically to withstand seismic forces, it must be designed for the full drift (deflection) of the whole structure calculated in accordance with Clause 5.4.2, Clause 5.5.4 or Clause 6.7.1 of AS 1770.4. Moment frames systems are much more flexible than shear wall systems and need careful review for drift especially with associated shear walls.

7. Ductility demands

One of the issues when designing structures in an area of low seismicity such as Australia is that when a major earthquake occurs which exceeds the design return period (annual probability of exceedance of 1/500 or 1/1000 years), then the increase in peak ground acceleration over the design event can be significant and therefore the increase in the lateral forces can be large. For a rare event with say a return period of 1/2500 years, this can be of an order of 3 or more. This increase is shown in Figure 1 Paulay and Priestley (17). For structures however designed in areas of high seismicity, the increase in peak ground acceleration is not as significant, perhaps 30%.

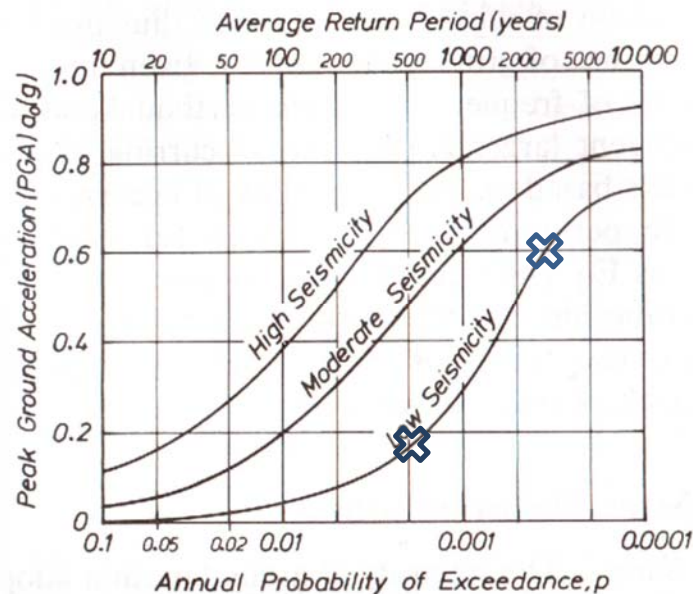


Figure 1 From Paulay & Priestley, 1992

8. Structural systems

Structural systems should be as simple as possible with readily understood gravity and lateral stability load paths. Some structural systems are more satisfactory than others in resisting earthquake-induced forces. One of the early tasks of the structural designer is to select a structural system that results in the best system for seismic performance of the building within the constraints dictated by the architect, the site and other conditions. Wherever practicable, alternative structural configuration should be considered at the concept stage to ensure that an undesirable geometry or structural form is not adopted before the detailed design of the building begins. In particular, structural irregularities both vertically and horizontally must be considered early in the design phase, and sound structural engineering principles applied to avoid or mitigate these effects.

AS 1170.4 specifies that all parts of a structure shall be interconnected, in both the horizontal and vertical directions. Connections between structural elements are typically the weakest chain in the link and should be detailed to fail in a ductile manner to avoid rapid degradation of strengths under earthquake actions.



Figure 2 Failure of Transfer Beam, Copthorne Hotel, Christchurch, photograph courtesy Peter McBean

The connections must be capable of transmitting the calculated horizontal earthquake force in order to provide load paths from all parts of the structure, and the earthquake forces carried to the footings and foundation. In turn, the foundations must be robust enough to accommodate the overload due to large events without catastrophic loss of strength.

In Australia, stair and lift cores are typically constructed with concrete walls because of the fire rating and construction techniques, which have developed over many years. As a result, most buildings in Australia will be either a concrete shear wall system or a combination of concrete shear walls and moment frames or moment frame only. The designer has to choose whether the shear walls are ductile or limited ductile elements. Once the structural system is chosen, the structural ductility factor μ and structural performance factor S_p can be determined in accordance with Table 6.5 (A) of AS 1170.4 or Table C3 of AS 3600. Ductile shear walls are often chosen where earthquake forces are higher than wind as the seismic reduction factor will lead to smaller members particularly foundations and the detailing is not too onerous. The decision as to which design route to take is left to the designer.

Because of the ratio of Structural Ductility Factor, μ , to the Structural Performance Factor S_p , the earthquake design actions will be increased by about 73% if the designer chooses an OMRF over an IMRF. Ordinary Moment Resisting Frames (OMRF) are deemed to require no further detailing consideration from the detailing required in the body of AS 3600.

One problem with moment resisting frames (MRF) is their lack of lateral stiffness and the large displacements (or drift) under earthquake actions often together with incompatibility of the rest of the structure in resisting such drifts. This can result in significant damage to adjoining structural elements and non-structural parts and components. In addition, the importance of any plastic hinges forming in the beams and not the columns in an extreme event. Band beams usually are significantly stiffer than the columns, making the concept of strong columns and weak beams difficult to achieve.

Also where excess strength is provided above that theoretically required by the design through rationalising the design, less ductility is required for the element e.g. due to the provision of additional reinforcement for tying, or extra thickness or depth of section for fire requirements or deflections. Therefore, less detailing for seismic resistance may help buildability.

9. Responsibility for the design

It is recommended in the Guide that if a number of designers are working on the design and detailing of a concrete structure for seismic actions the overall responsibility for the structural aspects of the project should be taken by one structural engineer called the Principal Designer..

The principal designer and the design team should preferably carry out all the structural design of the building. Where part of the design is assigned or subcontracted to others, the principal designer needs to understand and fully coordinate those designs and take overall responsibility for them. Examples of design by others are the design of precast concrete elements and post-tensioned floors.

The failure of the CTV building in Christchurch where 115 people lost their lives in this extreme event is attributed to the designer of the building who was not experienced in earthquake design and did not fully understand what was required and the senior engineer did not supervise the inexperienced designer (18).

10. Detailing and drafting of concrete elements

Conceptualisation, structural analysis and design are the first part of the overall design process of a structure and detailing and drafting the second part. Detailing and drafting consists of satisfactory plans, elevations, sections and details and an understanding of how each part of the structure will perform under seismic loads.

Detailing of the reinforcement is a vital part of the seismic design process for reinforced concrete. There must be sufficient transverse steel to prevent shear or crushing failures, anchorage of reinforcement into areas of confined concrete and buckling of compression steel, once the cover to the concrete has been lost due to cyclic movements. The main steel bars must not lose their anchorage into the surrounding concrete during the repeated reversing loading cycles they would be subjected to in a major earthquake. The anchorage lengths combining various parts of the structure together must be sufficient and allow for local failures.

The art of reinforcement detailing is to provide the reinforcement in the right places required by the design and to meet the expected earthquake demands. If the reinforcement is correctly placed and fixed; the concrete correctly placed around the reinforcement which has not moved, then the structure will comply with the intent of the design and should perform satisfactorily during its design life including seismic actions, assuming it has been designed correctly.

Detailing involves practical and detailed considerations on how and where the reinforcement should be placed. Experienced designers who understand the overall design and the seismic requirements of the building should be responsible for the overall detailing. Detailing must not be carried out by graduate, inexperienced engineers or drafters without senior supervision.

The basic assumption in any reinforced concrete design is that the designer is responsible to detail clearly and specify the reinforcement requirements on the drawings.

The designer is responsible for ensuring that the information on the drawings and specifications is sufficiently clear so that each concrete element can be correctly constructed on the site, and the final structure will comply with the design requirements.

With the correctly detailed structural drawings, the reinforcement processor can then process the reinforcement using the reinforcement schedules produced by the scheduler from the structural drawings and deliver it to the site. This will allow the steel fixers to fix the reinforcement correctly and the builder/contractor to place the concrete around the reinforcement.

The detailing of reinforcement of concrete elements often occurs reasonably late in the documentation phase, after the design is substantially completed, and the final drafting of the structure has commenced. Where possible, the structural design, including the drafting and detailing of the reinforcement should be completed prior to construction commencing.

Designers must allow enough time to complete the structural design and to detail the reinforcement adequately for all concrete elements, together with suitable checking and coordination. Checking should occur prior to issue of the drawings for construction and manufacture of reinforcement.

The detailing requirements of AS 3600 generally follow those of ACI 318 (19). With the trend to prefabrication of reinforcement off-site, attention needs to be given by designers as to how the components can be prefabricated and joined by drop in splice bars, known as loose bar detailing (20).

11. Diaphragms

Diaphragms in seismic design are the concrete floor and roof slabs. They are a critical element in the design of any building for seismic actions, as they tie the structure together and must be considered early in the design.

AS 1170 .4 makes passing reference to the deflection of diaphragms in Clause 5.2.5. AS 3600 in Clause 6.9.4, states that insitu concrete can be assumed to act as horizontal diaphragms. Unfortunately, there is no guidance in either Standard on the loads, the design of the diaphragm or the transfer of actions from diaphragms into the vertical elements.

Diaphragms have a number of roles in a building including carrying gravity loads and imposed vertical loads; to provide lateral support to vertical load bearing elements; to transfer the lateral earthquake actions applied at each floor level into the vertical elements. They also have a number of other functions such as redistribution of loads around openings, redistribution of forces due to torsion, and for resisting inclined or offset columns.

One method for the design of diaphragms has been to consider them as a horizontal deep beam where the flanges take the tension and compression as required as shown in Figure 3. Designers can also use a strut and tie approach. Diaphragms can also be rigid or elastic, regular or irregular, and have large penetrations, all of which can complicate their design.

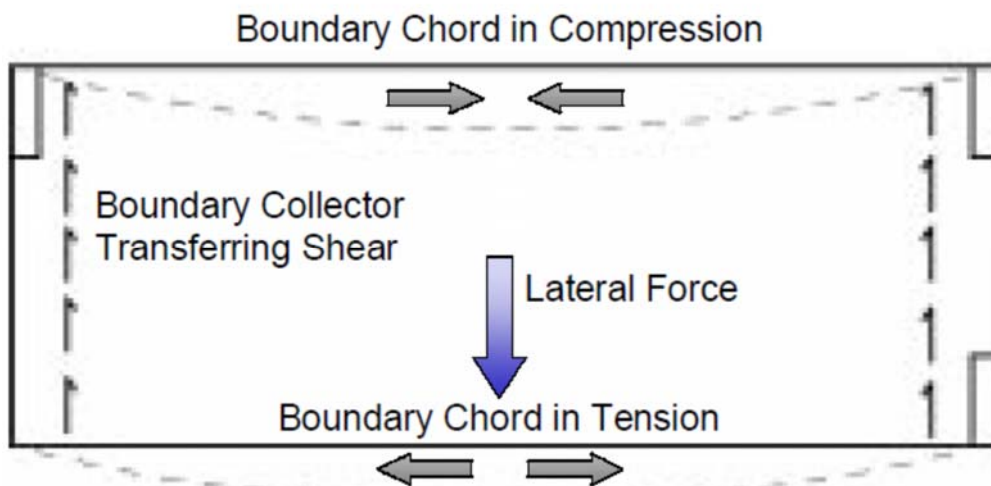


Figure 3 Floor as diaphragm after ATC/SEAOC briefing paper

Evaluating all the situations for the detailing of floor diaphragms requires experience and engineering judgement. For example, a building long and narrow in plan may be more flexible than thought, and the deformations may not be able to be accommodated by the walls at either end, resulting in separation of the walls from the diaphragm and possible failure.

Typically, edge beams form the edges of a diaphragm. They need to be continuously reinforced with the longitudinal bars fully lapped for tension and compression, restrained for compression and adequately anchored to the concrete walls and columns where they are attached.

Designers need to study how the forces from the diaphragm get into and out of the vertical elements, particularly shear walls and a good understanding of how these forces are transferred is necessary to ensure proper detailing.

Volume changes due to creep, shrinkage, thermal and post-tensioning also need to be considered with diaphragms. Where floors are temporally uncoupled from shear walls such as cores and lift shafts to allow for initial shrinkage, axial shortening, and post-tensioning effects, then correct detailing is required to ensure they will act as diaphragms in the final condition and are properly connected to the vertical elements.

Diaphragms will have a number of components depending on the design model adopted. Tension and compression members of the diaphragm are known as *collectors* or *collector bars* because they collect the shear forces and transmit them into the columns and walls. The earthquake forces must be transferred into the vertical element from the diaphragm, and these can be significant forces. The reinforcement used to transfer these forces is known as *drag bars*.

Failures of diaphragms in the recent high magnitude New Zealand Canterbury earthquakes were observed and a realisation that a more rigorous approach is required for the design of diaphragms. Designers need to consider these elements much more critically than they may have in the past (21, 22).

12. Conclusions

Australia is an area of moderate seismicity, of low probability but high consequence in comparison to areas such as California, Japan, and New Zealand. The provisions for both the design and detailing of reinforced concrete structures in Australia in accordance with the BCA and referenced Standards reflect this in the design and detailing required.

Many building structures in Australia will typically be designed and detailed in accordance with the main body of AS 3600 using the specific clauses for detailing in each section of the Standard. As a result, the detailing requirements are not that onerous and no more than would normally be required. Loose-bar detailing combined with efficient fabrication procedures and additional considerations, to provide the levels of ductility and continuity of reinforcement, will allow the structure to meet the anticipated earthquake loading satisfactorily in a life safety event.

With some additional design and detailing to Appendix C of AS 3600, the building can meet higher levels of earthquake resistance and minimise the damage requirements as required.

It is important to provide a minimum level of ductility in both beams and columns framing into a joint and to ensure adequate confinement of column reinforcement, regardless of the type of structural system employed.

With a limited additional quantity of appropriately detailed extra fitments and continuity reinforcement, plastic hinges can be induced to form at a given load. However, yielding will be ductile (gradual), even if the design earthquake load is exceeded (i.e. the hinge will act as a 'fuse' preventing transfer of the larger forces).

The choice for the designer is clear. A fully elastic response by the structure cannot be guaranteed, and a non-elastic response is allowed by the BCA and referenced Standards. Therefore, to prevent a catastrophic collapse and probable loss of life under a greater than design event, a ductile failure must be ensured. This minimum required level of ductility can be readily achieved by careful detailing and reducing the axial stresses in the columns and walls below the balance point on the interaction diagram.

Precast and tilt-up concrete construction requires additional care in detailing to ensure connection detailing is satisfactory and that floors are adequately supported and will act as diaphragms in order to correctly transfer horizontal forces.

Comparable overseas experience has shown reinforced concrete, both in situ, precast and tilt-up concrete, is a simple, suitable and cost-effective solution for building structures in all seismic conditions. For low to medium seismic areas such as Australia reinforced concrete is eminently suitable.

Designers and specifiers can remain confident of reinforced concrete's ability to function and to meet the needs of today's construction industry.

To further assist the client/building owner, designers and the builder/contractor specific seismic design checklists have been developed to provide a series of important questions for discussion and determination when conceptualising, designing and detailing reinforced concrete for structural performance under earthquake actions.

The new Guide will be a valuable resource for designers in Australia for the seismic design of reinforced concrete buildings.

13. References

1. The Institution of Engineers Australia, Newcastle Earthquake Study, 1990
2. The Institution of Engineers Australia et al, Conference on the Newcastle Earthquake, 1990
3. Standards Australia, AS 1170.4–1993, Minimum Design Loads on Structures, Part 4: Earthquake Loads.
4. Standards Australia, AS 3600–2009, Concrete Structures.
5. Standards Australia, AS 1170.4–2007, Structural design actions, Part 4: Earthquake actions in Australia.
6. Standards New Zealand, AS 1170.5–2004, Structural design actions, Part 5: Earthquake actions in New Zealand.
7. Standards Australia, AS 1170.0 Supplement 1:2002, Structural design actions- General Principles- Commentary
8. Building Code of Australia, the Australian Building Codes Board, July 2012
9. Standards Australia AS3600 Supplement 1, Concrete structures—Commentary (Supplement to AS 3600—2009), 2014
10. Melchers RE, Investigation of the Failure of the Newcastle Workers Club, Institution of Engineers Australia, Australian Journal of Structural Engineering, Vol 11 No 3
11. Woodside JW, Discussion Paper on the Investigation of the Failure of the Newcastle Workers Club, Institution of Engineers, Australian Journal of Structural Engineering, Vol 12 No 2
12. Wibowo A, Wilson JL, Lam NTKL, Gad EF, Drift performance of lightly reinforced concrete columns, Journal of Engineering Structures, Vol 59, pp 522-535, 2014
13. New Zealand Concrete Society & New Zealand National Society for Earthquake Engineering Guidelines for the Use of Structural Precast Concrete in Buildings 1991
14. Wilson JL, Robinson AJ, Balendra T, 2008, Performance of precast concrete load bearing panel structures in regions of low to moderate seismicity, Journal of Engineering Structures, Vol 30, July, pp 1831-1841
15. The Institution of Structural Engineers, Practical guide to structural robustness and disproportionate collapse in buildings, October 2010
16. Byfield M, Wjesundara M, Morrison C and Stoddart E, A Review of Progressive Collapse Research and Regulations, Proceeding of the Institution of Civil Engineers, Structures and Buildings 167 August 2014 Issue SB8
17. Paulay T and Priestley M J N, Seismic Design of Reinforced Concrete and Masonry Buildings, John Wiley & Sons Inc, 1992.
18. Canterbury Earthquakes Royal Commission, Volume 6, Canterbury Television Building (CTV) <http://canterbury.royalcommission.govt.nz>
19. ACI 318 – 11M, Building code requirements for structural concrete, American Concrete Institute, 2011
20. Concrete Institute of Australia, Recommended Practice, Reinforcing Detailing Handbook for Reinforced and Prestressed Concrete, updated and republished 2014
21. Gardner DR, Bull DK and Carr AJ, Internal forces in concrete floor diaphragms of multi-story structures during seismic shaking, 14th world conference on earthquake engineering, Beijing, 2008
22. NEHRP, Seismic Design Technical Brief Number 3, Seismic Design of Cast in Place Concrete Diaphragms, Chords and Collectors, a Guide for Practicing Engineers, 2010